

Village Stone

Village Stone

This special combination of a modified octagon with a medium square is a worldwide favorite. It's shape is appropriate in both traditional and contemporary settings. To facilitate laying along an edge, an edge stone is available. Other paving stones may be laid around the perimeter to enhance the appeal.

Composition and Manufacture

Village Stone is made from a low moisture concrete mixture. It is made under high pressure and high frequency vibration, producing a very dense stone, low in water absorption (less than 5%) and high in compressive strength PSI (above 8000). It is designed to meet or exceed ASTM C-936 and ASTM C-67 (freeze/thaw) specifications. Village Stone is available in a large variety of stock colors and color blends. Custom and non-stock colors are available upon request.

“Enjoy the Durability, Beauty, Convenience and Value of The Perfect Paving System”


Installation:

1. Layout and excavate 6"-8" deep, 4"-6" beyond finished size. Compact sub-grade. Backfill with crushed aggregate and compact again. Assure a minimum of 1 ½" of slope in 10' of drainage. Typically 4"-6" of compacted base should be used for light vehicular and pedestrian traffic, or 6"-12" for heavy vehicular or industrial traffic.
2. Screed concrete sand or similar product on a prepared base to a uniform depth of 1".
3. Place stones on sand bed. Cutting of stones can be done with a masonry saw or a stone splitter.
4. Place edge restraint along edges to hold edge. You may use concrete, PVC edge system, treated wood or steel.
5. Compact paving stone with a vibratory plate compactor until uniformly level and true to grade. Fill joints by sweeping in sand.

Dimensions:

Full Stone


Thickness: 60mm (2 ¾")*
Width: 139mm (5 ⅞")
Length: 229mm (9")
Pcs/SqFt: 3.5
Approx Wt: 60mm - 8lbs/pc



*Also available in 80mm. Contact Western Interlock for specifications.

Edge Stone

Thickness: 60mm (2 ¾")*
Width: 114mm (4 ½")
Length: 229mm (9")
Pcs/SqFt: 4.4
Approx Wt: 60mm - 7lbs/pc




*Also available in 80mm. Contact Western Interlock for specifications.


Applications:

- Western Interlock pavers may be used for:
- Patios • Walkways • Pool Decks • Malls • Roof Decks
 - Plazas • Courtyards • Streets • Driveways

Installation Pattern

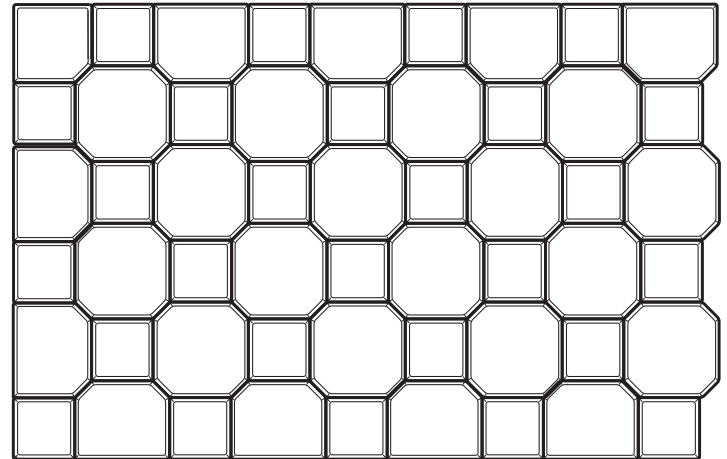

Typical Cross Section of Concrete Paver Installation

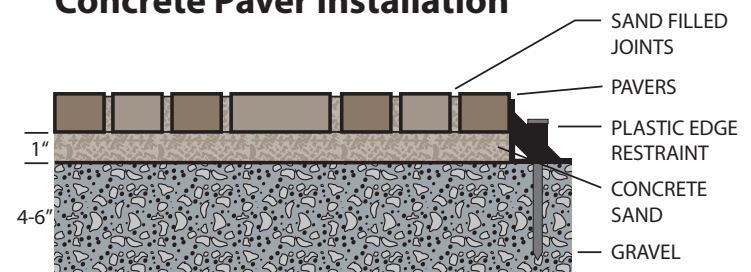

Paving Stones and Retaining Wall Systems Made for the Northwest

Western Interlock, Inc. (503)623-9084
10095 Rickreall Rd. 1(800) 627-3153
Rickreall, Oregon 97371 fax (503) 623-9122

