

City Square

City Square

City Square is similar to Arena Stone only in a smaller 6"x6" square. It looks well alone, or City Square also dovetails nicely with our Arena Stone in a half scale ratio.

Composition and Manufacture

City Square is made from a low moisture concrete mixture. It is made under high pressure and high frequency vibration, producing a very dense stone, low in water absorption (less than 5%) and high in compressive strength PSI (above 8000). It is designed to meet or exceed ASTM C-936 and ASTM C-67 (freeze/thaw) specifications. City Square is available in a large variety of stock colors and color blends. Custom and non-stock colors are available upon request.


“Enjoy the Durability, Beauty, Convenience and Value of The Perfect Paving System”

Installation:

1. Layout and excavate 6"-8" deep, 4"-6" beyond finished size. Compact sub-grade. Backfill with crushed aggregate and compact again. Assure a minimum of 1 ½" of slope in 10' of drainage. Typically 4"-6" of compacted base should be used for light vehicular and pedestrian traffic, or 6"-12" for heavy vehicular or industrial traffic.
2. Screed concrete sand or similar product on a prepared base to a uniform depth of 1".
3. Place stones on sand bed. Cutting of stones can be done with a masonry saw or a stone splitter.
4. Place edge restraint along edges to hold edge. You may use concrete, PVC edge system, treated wood or steel.
5. Compact paving stone with a vibratory plate compactor until uniformly level and true to grade. Fill joints by sweeping in sand.

Dimensions:


Thickness: 60mm (2 ¾")
Width: 149mm (5 ⅞")
Length: 149mm (5 ⅞")
Pcs/SqFt: 4.09
Approx Wt: 60mm - 8lbs/pc



Applications:


- Western Interlock pavers may be used for:
- Patios • Walkways • Pool Decks • Malls • Roof Decks
 - Plazas • Courtyards • Driveways

Installation Pattern*

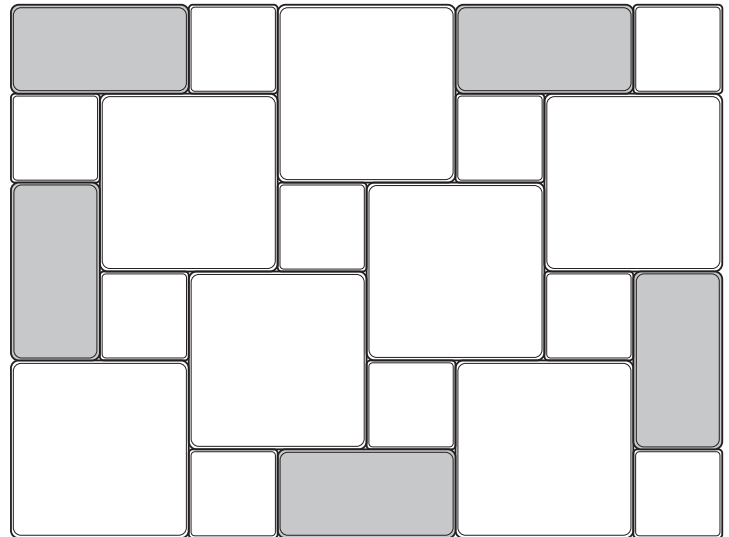

* Shown with City Square and cut Arena Stones. Cut stones are shown in gray. The pattern can be continued by using a whole stone in these places.

Typical Cross Section of Concrete Paver Installation

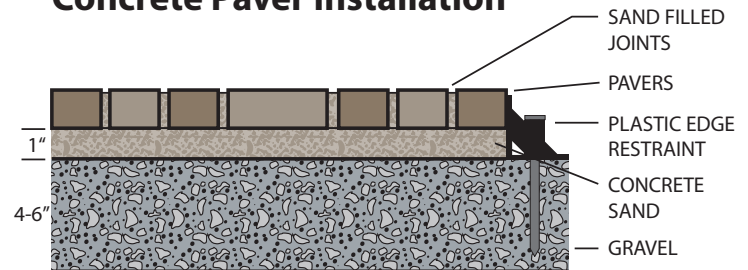

Paving Stones and Retaining Wall Systems Made for the Northwest

Western Interlock, Inc. (503)623-9084
10095 Rickreall Rd. 1(800) 627-3153
Rickreall, Oregon 97371 fax (503) 623-9122

