



## TECHNICAL DATA SHEET

# Superior Strength Solvent-Based Adhesive



Regular

VOC

### NOTICE

Make sure you have an up-to-date technical data sheet by referencing our website: [SRWProducts.com](http://SRWProducts.com)

### DESCRIPTION

A solvent-based adhesive, that when fully cured provides the strongest bond on the market. Ideal for stone, concrete, wood and metal.

### APPLICATIONS

- Retaining Walls
- Pavers / Block
- Firepits
- Concrete
- Metals / Wood
- Masonry
- Natural Stone
- Works on most common landscape and construction materials
- Indoor / Outdoor
- False Joints
- Concrete Overlays & Non-Overlay Project
- Residential or Commercial Use

### PROPERTIES

- Superior strength and longevity
- Works on wet or frozen surfaces
- High-temperature compatible
- Will not freeze & extrudes down to 10°F (-13°C)
- Regular and VOC compliant
- Interior/exterior use

### CURING TIME

- 2 - 4 hour firm set
- 3 - 7 day full cure
- 10 minute working time

### COVERAGE

<b>COVERAGE:</b> <i>Approximate Length of Bead</i>		
Bead Size	10 oz	28 oz
1/4"	32 ft	89 ft
3/8"	14 ft	35 ft

SRW Products  
800-752-9326

32005 126th St.  
PO Box 70  
Princeton, MN 55371

[SRWProducts.com](http://SRWProducts.com)

Revised: 07-12-2019

Pavermate Z3™ Technical Data Sheet

Page 1 of 5

## USER TIPS

- For tumbled products use a 3/8" bead.
- A full positive connection of adhesive to both surfaces is necessary.
- Not for continuous submersion or use below the waterline.
- The surface must dry out 24–48 hours after applying the adhesive.
- Not for use on plastic, rubber, or fiberglass materials.
- Not suitable for direct contact with fire or fire bricks.


## INSTALLATION INSTRUCTIONS

1. Surfaces must be clean and free from oil, grease, excessive water, ice or any other material that may interfere with proper adhesion.
2. Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal with nail or wire and place in cartridge gun
3. Apply adhesive to one of the surfaces in a continuous bead.
4. Apply no more adhesive than you can cover in 10 minutes.
5. Press surfaces together firmly. For faster curing, lift top product and immediately reposition (flash).
6. Vertical applications require permanent horizontal support.



### FLASHING

Flash the adhesive by lifting the cap or block (shown left) for a couple of seconds to shorten the curing time.

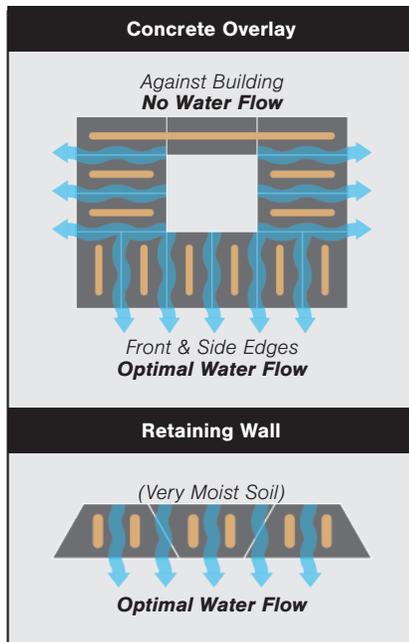

*\*For illustrative purposes only*

### APPLICATION PATTERN

Consult the application patterns diagram to the left to see suggested application patterns for different types of projects. Choose the best methods for your particular project to allow for optimal moisture drainage. We recommend using SRW Superior Strength Solvent- Based Adhesive for all concrete overlays and retaining wall caps, along with most other general construction needs.

**SRW Products**  
800-752-9326

32005 126th St.  
PO Box 70  
Princeton, MN 55371

SRWProducts.com

Revised: 07-12-2019

Pavermate Z3™ Technical Data Sheet

Page 2 of 5

## STORAGE AND SHELF LIFE

- Store in an upright position out of direct sunlight. Will not freeze or be damaged by low temperatures. SHELF LIFE: 18 months.
- **EXCEEDS SPECS:** ASTM D3498, APA AFG-01, ASTM C557

## CLEAN UP

Tools and adhesive may be cleaned with mineral spirits while adhesive is wet. Follow solvent vendor's precautions.

## WARNINGS

**DANGER: EXTREMELY FLAMMABLE. VAPOR HARMFUL.** Contains acetone, hexane and toluene. Keep away from heat, sparks and flame. Use only with positive cross-ventilation. Avoid breathing vapors. Do not swallow. Do not allow eye contact or prolonged skin contact. Uncured product can cause eye or skin irritation. Prolonged or repeated overexposure to solvents in uncured product can cause central nervous system, peripheral nervous system, eye, skin, liver, and reproductive or respiratory system effects. First Aid: If dizziness or other adverse effects are experienced, move to fresh air; contact physician if discomfort persists. If eye contact occurs, flush eyes with water for 15 minutes; contact physician immediately. If swallowed, do not induce vomiting; contact physician immediately. Wash skin contact areas with soap and water; contact physician if irritation persists. For additional information, refer to Material Safety Data Sheet. **KEEP OUT OF THE REACH OF CHILDREN.**

**IMPORTANT NOTICE:** Our recommendations, if any, for the use of this product are based on tests believed to be reliable. Since the use of this product is beyond the control of the manufacturer, no guarantee or warranty, expressed or implied, is made for the merchantability, fitness or suitability for the use of this product or otherwise extending beyond the description hereof except the obligation to replace that product or portion of shipment proved defective. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing laws and/or patents covering any material or use. Liability is limited to product replacement only. Test in a small, discrete area before use.

## SHIPPING

?

## PACKAGING

SRW Superior Strength Solvent-Based Adhesive			
PART #	SIZE	AMT PER CTN	QUANTITY
A 10	10 oz	12/CTN	64 CTNS/PLT
A 28	28 oz	12/CTN	44 CTNS/PLT

SRW Superior Strength Solvent-Based Adhesive VOC			
PART #	SIZE	AMT PER CTN	QUANTITY
AP 10	10 oz	12/CTN	64 CTNS/PLT
AP 28	28 oz	12/CTN	44 CTNS/PLT

### SRW Products

800-752-9326

32005 126th St.

PO Box 70

Princeton, MN 55371

SRWProducts.com

Revised: 07-12-2019

Pavermate Z3™ Technical Data Sheet

Page 3 of 5

## **SRW PRODUCTS® GUARANTEE**

When properly used as intended, should one of our products not perform to your expectations, SRW Products will replace the defective product with the same or similar item. Monetary refunds are not available for products or additional expenses incurred with the use or application of this product; including, but not limited to, labor for installation and other materials or costs. SRW Products will not replace products which have been misused or abused. To make a defective product claim, send the entire product purchased, a legible copy of your dated sales receipt, photo of defective product or area, and a letter detailing the nature of the problem to:

**SRW Products Attn: Customer Service  
PO Box 70 Princeton, MN 55371**

Please include your full name, mailing address, and phone number. This guarantee expires five years from the product purchase date.

We take pride in selling solid solutions for better hardscapes. If you have suggestions or comments, please email us at [srw@srwproducts.com](mailto:srw@srwproducts.com).

## **INDICACIONES:**

1. Las superficies deben estar limpias y libres de aceite, grasa, agua excesiva, hielo o cualquier otro material que pueda impedir una adhesión adecuada.
2. Corte la punta de forma inclinada para formar un cordón de entre 6.3 mm y 9.5 mm. Perfore el sello interno con un clavo o alambre y colóquelo en una pistola de cartucho.
3. Aplique el adhesivo en una de las superficies como un cordón continuo.
4. No aplique más adhesivo del que pueda cubrir en 10 minutos.
5. Presione las superficies entre sí con firmeza. Para un endurecimiento más rápido, levante el producto de arriba y vuelva a colocarlo en su lugar de inmediato (secado rápido).
6. Las aplicaciones en posición vertical requieren un soporte horizontal permanente.

## **CONSEJOS PARA EL USUARIO:**

1. Para productos irregulares, use un cordón de 9.5 mm.
2. Es necesaria una completa conexión positiva del adhesivo en ambas superficies.
3. No utilice el producto en sumersiones continuas o debajo de la línea de agua.
4. La superficie debe secarse 24-48 horas después de aplicar el adhesivo
5. No apto para usar con materiales de plástico, goma o fibra de vidrio.
6. No apto para contacto directo con fuego o ladrillos refractarios.

**TEMPERATURAS DE APLICACIÓN:** De -12.2°C a 48.8°C para adhesivos y superficies.

**TIEMPO DE ACCIÓN:** 10 minutos.

**COBERTURA APROXIMADA:** Cordón de 6.3 mm es de 9.75 m o 9.5 mm es de 4.26 m.

**LIMPIEZA:** Las herramientas y el adhesivo deben limpiarse con solventes minerales mientras el adhesivo aún está húmedo. Tenga en cuenta las precauciones que indica el proveedor del solvente.

**VIDA ÚTIL:** 18 meses.

**ALMACENAMIENTO:** Almacene en posición vertical, fuera del alcance de la luz solar. No se congelará ni se dañará debido a bajas temperaturas.

**EXCEDE LAS ESPECIFICACIONES DE LAS NORMAS:** ASTM D3498, APA AFG-01, ASTM C557.



**SRW Products**  
800-752-9326

32005 126th St.  
PO Box 70  
Princeton, MN 55371

[SRWProducts.com](http://SRWProducts.com)

Revised: 07-12-2019

Pavermate Z3™ Technical Data Sheet

Page 4 of 5

## **ADVERTENCIAS**

**PARA ADVERTENCIAS COMPLETA VISITA:** [SRWproducts.com/espanol](http://SRWproducts.com/espanol)

**PELIGRO: EXTREMADAMENTE INFLAMABLE. VAPOR PELIGROSO. IRRITANTE.** Contiene acetona, hexano y tolueno. Mantenga alejado del calor, las chispas y las llamas. Utilice sólo con una ventilación cruzada cierta. Evite respirar los vapores. No lo tragues. No permita el contacto con los ojos ni un contacto prolongado con la piel. El producto no curado puede causar irritación en los ojos o la piel. La sobreexposición prolongada o repetida a los solventes en productos no curados puede causar efectos en el sistema nervioso central, hígado, riñón, sistema respiratorio o reproductivo.

**PRIMEROS AUXILIOS:** En case de desmayo o vértigo u otros efectos adversos, diríjase a un lugar con aire fresco; si persisten las molestias contacte a un médico. Si ocurre contacto ocular, enjuague los ojos con agua durante 15 minutos; contacte al médico inmediatamente. Si ha sido ingerido, no induzca el vómito; contacte al medico inmediatamente. Lave las áreas de contacto con la piel con agua y jabón, contacte al médico si persiste la irritación. Para obtener información adicional, remítase a la Ficha Técnica de Seguridad. **MANTENGA FUERA DEL ALCANCE DE LOS NIÑOS.**

### **SRW Products**

800-752-9326

32005 126th St.

PO Box 70

Princeton, MN 55371

[SRWProducts.com](http://SRWProducts.com)

Revised: 07-12-2019

*Pavermate Z3™ Technical Data Sheet*

Page 5 of 5